


## **ML 2236 FDA**

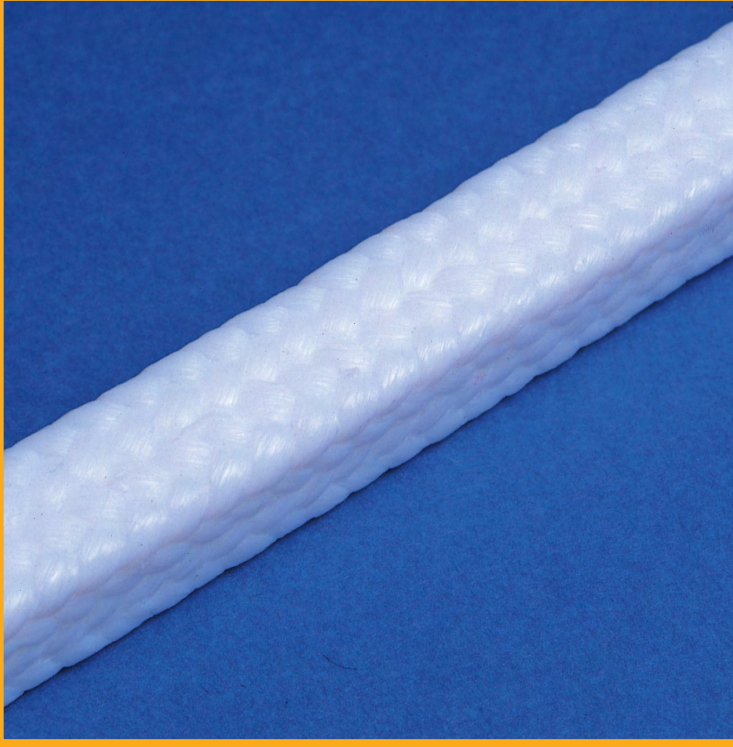

## **PRE-LUBED PTFE YARN PACKING**

### **RECOMMENDED FOR**

Applications in the food processing industry or where an FDA material is required.

### **FEATURES**

Pure PTFE filament lubricated with a proprietary lubricant that complies FDA requirements.

### **SERVICE CONDITIONS**

Shaft speeds to 1200 FPM; temperatures to 500°F/260°C; pH range 0-14.

### **CONSTRUCTION**

Multi-Lok Braid

### **EQUIPMENT**

Any equipment where braided packing is commonly used.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.